

# STAND-ALONE SCREWS HANDMOTION



## CANNULATED SCREWS

### Intended purpose:



Implants of the Stand-Alone Screws range are intended for fractures fixation, osteotomies and arthrodeses of bones in adults, appropriate for the size of the device.

### Contraindications:

- Pregnancy.
- Acute or chronic local or systemic infections.
- Allergy to one of the materials used or sensitivity to foreign bodies.

## TECHNICAL FEATURES

- Self-compressive or positioning screws;
- Self-drilling and self-tapping screws;
- 3 diameters: **Ø2.25mm, Ø2.6mm, Ø3.0mm**
- 3 types of threads:
  - Short threaded screw;
  - Long threaded screw;
  - Fully threaded screw;
- Cannulated screws
- The cylindro-conical profile of the head allows a non-traumatic insertion of the screw into the cortical bone;
- Available in sterile and non-sterile version;
- Material: TA6V

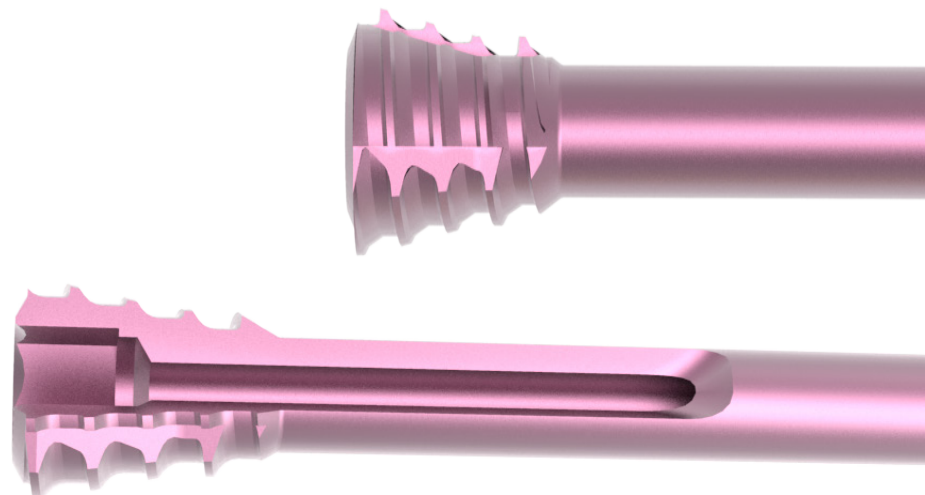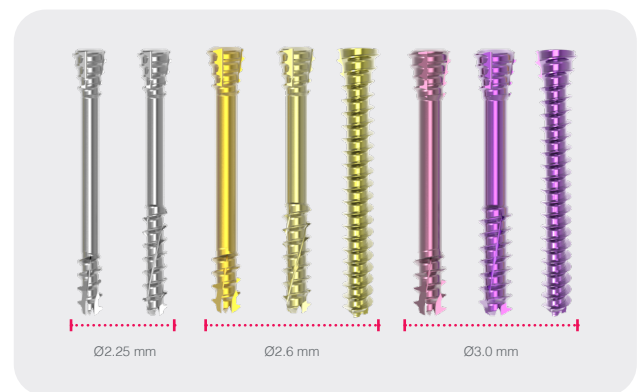

# REFERENCES

## → SHORT THREADED CANNULATED SCREWS

**Ø2.25 MM  
CANNULATED SCREWS\***



Ref	Description
H0.9IFT2.25Lxx - ST	Ø2.25 mm self-compressive screw - cannula Ø0.9 - short thread - Lxx mm - STERILE Lengths: from 14 mm to 34 mm (2 mm increments)

\*Non anodized

## → LONG THREADED CANNULATED SCREWS


**Ø2.25 MM  
CANNULATED SCREWS\***



Ref	Description
H0.9HFT2.25Lxx - ST	Ø2.25 mm self-compressive screw - cannula Ø0.9 - long thread - Lxx mm - STERILE Lengths: from 12 mm to 34 mm (2 mm increments)

\*Non anodized


**Ø2.6 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1IFT2.6Lxx - ST	Ø2.6 mm self-compressive screw - cannula Ø1.1 - short thread - Lxx mm Lengths: from 14 mm to 34 mm (2 mm increments)

\*Gold anodized


**Ø2.6 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1HFT2.6Lxx - ST	Ø2.6 mm self-compressive screw - cannula Ø1.1 - long thread - Lxx mm - STERILE Lengths: from 10 mm to 34 mm (2 mm increments)

\*Yellow anodized


**Ø3.0 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1IFT3.0Lxx - ST	Ø3.0 mm Self-drilling self-compressive screw Cannulated Ø1.1 mm - Lxx mm STERILE Lengths: from 14 mm to 34 mm (2 mm increments)

\*Pink anodized

**Ø3.0 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1HFT3.0Lxx - ST	Ø3.0 mm Self-drilling self-compressive screw Cannulated Ø1.1 mm - Lxx mm STERILE Lengths: from 10 mm to 40 mm (2 mm increments)

\*Fuchsia anodized

## → FULLY THREADED CANNULATED SCREWS


**Ø2.6 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1GFT2.6Lxx - ST	Ø2.6 mm neutralization screw - cannula Ø1.1 - full thread - Lxx mm - STERILE Lengths: from 10 mm to 34 mm (2 mm increments)

\*Yellow anodized

**Ø3.0 MM  
CANNULATED SCREWS\***



Ref	Description
H1.1GFT3.0Lxx - ST	Ø3.0 mm neutralization screw - cannula Ø1.1 - full thread - Lxx mm - STERILE Lengths : from 10 mm to 40 mm (2 mm increments)

\*Fuchsia anodized

# REFERENCES

## → INSTRUMENTATION

INSTRUMENTATION		
Ref.	Screw	Description
ANC104	●	1.5 mm quick coupling hexagonal prehensor screwdriver - cannula Ø0.9 mm
ANC105	●	Ø0.8 mm Pin guide
ANC106	●	Ø1.7 mm quick coupling drill bit - cannula Ø0.9 mm
ANC108		Length gauge for pin Ø1.0 mm - L150 mm
ANC125	● ●	Ø1.0 mm pin guide
ANC135	●	Ø2.0 mm quick coupling drill bit - cannulated Ø1.1 mm
ANC137	●	Ø2.2 mm quick coupling drill bit - cannulated Ø1.1 mm
ANC139	●	2.0 mm quick coupling hexagonal prehensor screwdriver - cannula Ø1.1 mm
ANC140	●	Ø1.7 mm countersink - cannula Ø0.9 mm
ANC141	●	Ø2.0 mm countersink - cannula Ø1.1 mm
ANC142	●	Ø2.2 mm countersink - cannula Ø1.1 mm
ANC148	●	1.8 mm quick coupling hexagonal prehensor screwdriver - cannula Ø1.1 mm
ANC166	●	Pins support for Ø0.8 mm pin
ANC166L	●	Pins support for Ø0.8 mm pin - Long
ANC167	● ●	Pins support for Ø1.0 mm pin
ANC167L	● ●	Pins support for Ø1.0 mm pin - Long
ANC699	●	3 in 1 instrument for Ø2.25 mm screws
ANC700	●	3 in 1 instrument for Ø2.6 mm screws
ANC701	●	3 in 1 instrument for Ø3.0 mm screws
ANC350		Ø4.5 mm AO quick coupling handle - Size 1
33.0208.150	●	Pin Ø0.8 - L150 mm
33.0210.150	● ●	Pin Ø1.0 - L150 mm
ANC154		Footmotion / Handmotion instrumentation set
ANC155/CB		Footmotion / Handmotion set - Cambered lid
ANC155		Footmotion / Handmotion implants set

EXTREMITY METACARPAL SCREWS FIXATION OPTIONS		
Ref.	Description	Compatible with screws
ANC1352*	2 in 1 instrument for Ø2.6 mm screws	H1.1GFT2.6Lxx Length : 10 to 34 mm (2mm incrementation)
ANC1353*	2 in 1 instrument for Ø3.0 mm screws	H1.1GFT3.0Lxx Length : 10 to 40 mm (2mm incrementation)

\* Available on demand only

### Remark:

Please note that all implants are also available in sterile packaging. An "-ST" code is added at the end of the reference.  
Ex : «H1.1IFT2.6L14-ST»

This information is intended to demonstrate the Newclip Technics portfolio of medical devices. Always refer to the package insert, product label and/or user instructions including cleaning and sterilization before using any Newclip Technics product. These products must be handled and/or implanted by trained and qualified staff who have read the instructions before use. A surgeon must always rely on her or his own professional clinical judgement when deciding whether to use a particular product when treating a particular patient. Product availability is subject to the regulatory or medical practices that govern individual markets. Please contact your Newclip Technics representative if you have questions about the availability of Newclip Technics products in your area.

Manufacturer : Newclip Technics – Brochure EN – HANDMOTION – ED7 – 10/2024 – Medical device EC: class IIb – CE1639 SGS BE  
Read labelling and instructions before the use of Newclip Technics medical devices. These products must be handled and/or implanted by trained and qualified staff who have read the instructions before use.

Non-contractual pictures.

**newcliptechnics.com**

